

800.643.3522



If you have any questions regarding our products, call our toll-free consumer customer service line:

Visit our web page: [www.thehammocksource.com](http://www.thehammocksource.com)

## Large Tri-Beam® Hammock Stand

Congratulations on your purchase of the Large Tri-Beam® Hammock Stand. We believe that you will find it a product of unsurpassed quality and durability.

### Hardware Included:

- 3 - Poles
- 2 - Foot Brackets
- 2 - Pole End Plugs
- 4 - Foot End Plugs
- 2 - Offset Hooks

### Assembly:



1. Place the foot end plugs in the foot brackets.
2. Place one pole between the two foot brackets and insert the foot brackets. Push down on the spring pins while pushing the poles into place until the spring pins on the foot brackets exit through the holes and lock into place. See Fig 1.
3. Arrange the remaining two poles at each end. Push down on the spring pins while pushing the poles into place until the spring pins on the foot brackets exit through the holes and lock into place.
4. Place the pole end plugs in the end poles.
5. Insert one offset hook at each hole on upper end of each pole. This is done by inserting the hook perpendicular to the pole and turning it to align with the pole.
6. Using the chain provided with your hammock, hang your hammock tightly on the hooks and sit into the hammock slowly. Your hammock will stretch and you may experience "bottoming-out" initially. **Take extreme care when sitting in the hammock for the first time.** Once this initial stretching occurs, you will want to tighten the hammock chains. Repeat this until a comfortable height is reached; **always using care when sitting in an untightened hammock.**

**WARNING: DO NOT EXCEED LOAD LIMIT OF 600 LBS.**

Stands should be examined periodically to ensure that:

- Each welded joint is fully intact.
- There are no missing plugs (rust protection).
- There is no excessive rust.

5059  
M.OM

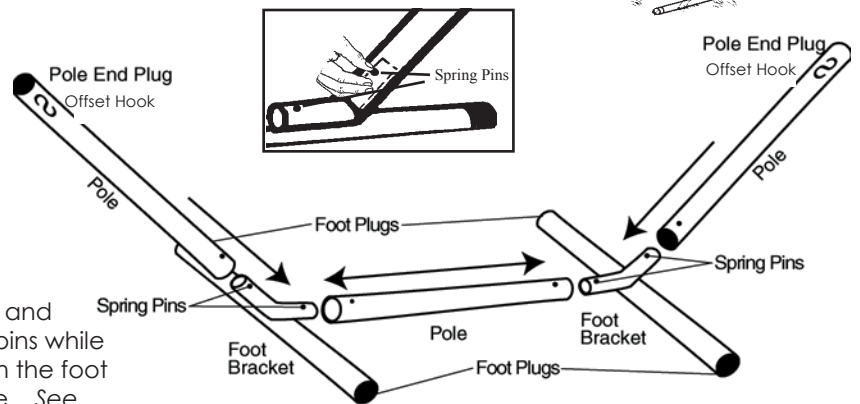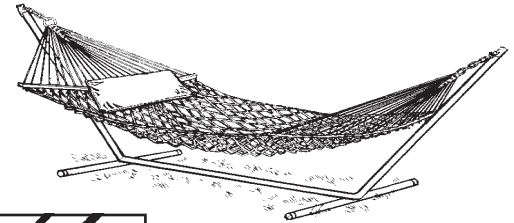

### CAUTION! CAUTION! CAUTION!

- Do not drag or pull your hammock stand when moving or adjusting.
- ALWAYS lift from both ends.
- If a wheel kit, purchased separately, is installed, you may lift and move from the opposite end from the wheels.
- NEVER drag or pull your hammock stand even when wheels are installed.
- After any moving or adjusting of your hammock stand, ALWAYS inspect to make sure the spring pins are properly inserted. Failure to do so may result in the hammock stand collapsing upon use.
- DO NOT REPLACE THE OFFSET HOOKS WITH OTHER HARDWARE. The hooks that come with your hammock are specially selected to be strong enough for use with your hammock stand. If you need replacement hooks, please contact The HammockSource at 1-800-643-3522.

**WARRANTY INFORMATION:** Products of The HammockSource are guaranteed to be free of defects in workmanship and materials for up to one year after the purchase date. Prolonged exposure to weather conditions including snow, rain, and humidity are not covered under the warranty nor is damage caused by normal wear, mildew, improper care including storage, maintenance, and installation. If an item is found to be defective within one year of its purchase, it will be replaced without charge upon the return of the unit accompanied by a sales receipt. If you choose to return an item, you must contact our customer service department at 800.643.3522 to obtain a Return Authorization Number that will allow us to track your unit once it arrives at our warehouse; thereby creating a faster response to your concern.