



If you have any questions regarding our products, call our toll-free consumer customer service line: **800.643.3522**  
Visit our web page: [www.thehammocksource.com](http://www.thehammocksource.com)

# Steel Swing Stand

**Congratulations on your purchase of the Steel Swing Stand. We believe that you will find it a product of unsurpassed quality and durability.**

## SPECIAL NOTE:

These assembly instructions have been developed to make it as easy as possible for you to assemble the Steel Swing Stand by yourself. However, there are several points during assembly of this stand when you may find it helpful to have "an extra pair of hands" to help you.

### Stand Units:

- |                |                     |
|----------------|---------------------|
| (1) top brace  | (1) bottom brace    |
| (2) side poles | (2) foot assemblies |


### Hardware Included:

- |              |                |
|--------------|----------------|
| (4) end caps | (2) s-hooks    |
| (4) bolts    | (4) Nyloc nuts |

Tools needed to assemble your Steel Swing Stand: 2 Adjustable Wrenches



*Steel Swing Stand shown with Double Cushioned Swing (Swing is sold separately.)*

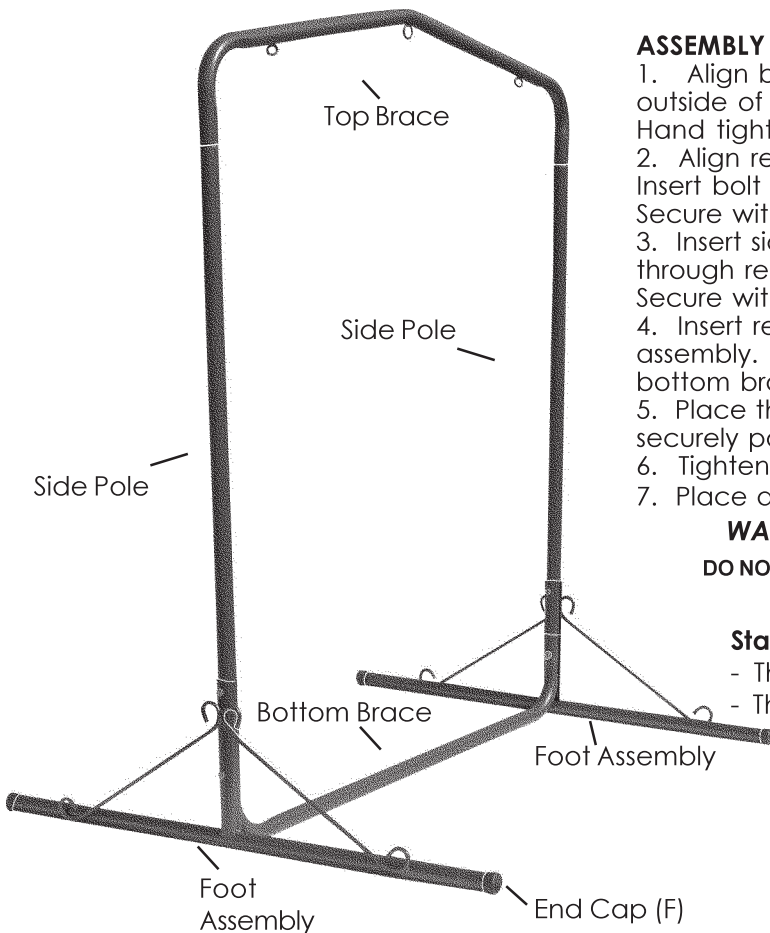

## ASSEMBLY INSTRUCTIONS:

1. Align bottom brace with a foot assembly. Insert bolt from the outside of the stand through the bottom hole. Secure bolt with nut. Hand tighten.
2. Align remaining foot assembly with opposite end of bottom brace. Insert bolt from the outside of the stand through the bottom hole. Secure with nut. Hand tighten.
3. Insert side pole onto one end of bottom brace assembly. Insert bolt through remaining hole of the side pole and bottom brace assembly. Secure with nut. Hand tighten.
4. Insert remaining side pole onto opposite end of bottom brace assembly. Insert bolt through remaining hole of the center pole and bottom brace assembly. Secure with nut. Hand tighten.
5. Place the top brace onto the side poles. Make sure the top brace is securely positioned on side poles.
6. Tighten all bolt connections with two adjustable wrenches.
7. Place a foot cap onto each end of the foot assembly.

**WARNING: DO NOT EXCEED LOAD LIMIT OF 450 lbs.**

**DO NOT ALLOW CHILDREN TO USE THE HAMMOCK WITHOUT DIRECT ADULT SUPERVISION. DO NOT HAVE INFANTS IN THE HAMMOCK.**

**Stands should be examined periodically to ensure that:**

- There are no missing caps (rust protection).
- There is no excessive rust.

## CARE AND MAINTENANCE:

- \* You may want to disassemble your stand for more convenient storage during the cooler part of the year.
- \* To clean your stand, simply wipe it off with a soft, damp cloth; then dry it off immediately using a clean, dry, soft towel.
- \* If the finish on our stand gets scratched, it can be touched up easily with automotive touch-up paint, available at most auto parts stores and many department stores.
- \* Your stand has been finished with a long-lasting out-door-grade finish. To prolong the life of your stand even further, you can wax it every 3-6 months with automotive wax in the same manner that you would wax your car.
- \* Depending on your geographical location, your stand eventually may need to be repainted. To do so, first, prepare the surface of the finish by sanding it with a very fine grit sandpaper. Then, wipe it off with a soft cloth and paint the stand with a high quality outdoor-grade enamel paint, available at most hardware stores.

## WARRANTY INFORMATION:

Products of The HammockSource are guaranteed to be free of defects in workmanship and materials for up to one year after the purchase date. Prolonged exposure to weather conditions including snow, rain, and humidity are not covered under the warranty nor is damage caused by normal wear, mildew, improper care including storage, maintenance, and installation. If an item is found to be defective within one year of its purchase, it will be replaced without charge upon the return of the unit accompanied by a sales receipt. A Return Authorization is needed for return and may be obtained by contacting 800.334.1078.